

PK 14002-EH

High Performance

PALFINGER CRANE



KTL
protected

**Paltronic
50**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored

AOS
Active Oscillation Suppression
inside


The highest level of crane performance

Operators couldn't be happier about the comfort and functionality of the PK 14002 EH *High Performance*. The "High Performer" outshines its class with its innovative technology, functional design, and equipment that define today's modern loading crane. Its efficiency and profitability are a boon for the construction sector as well as for servicing municipal needs.


Manoeuvrability and precision

PK 14002 EH High Performance

C

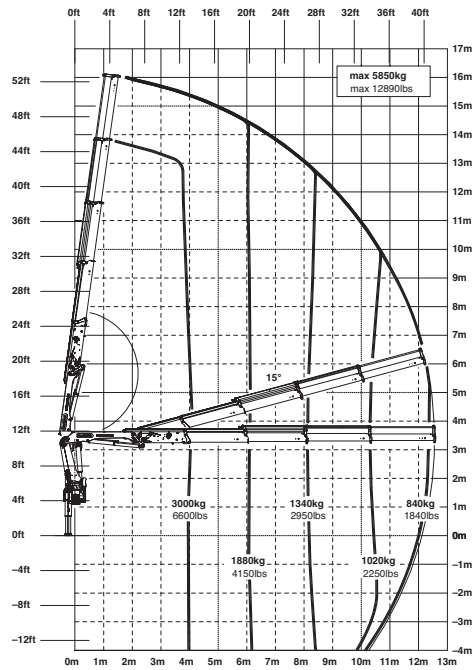

E

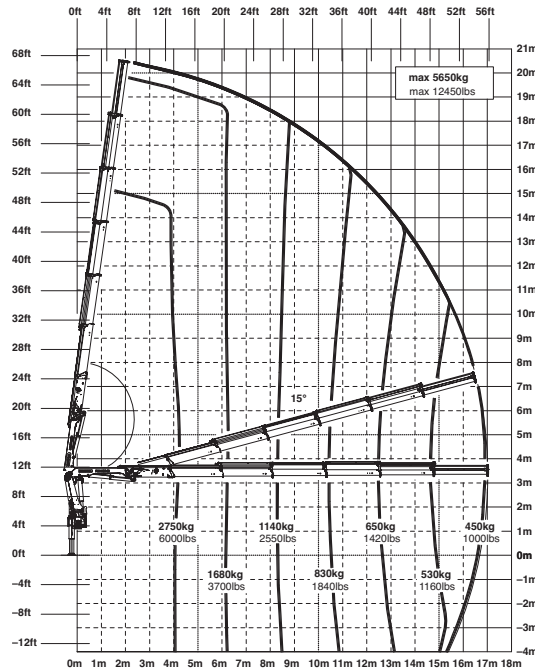

Technical Specifications (EN 12999 H1-B3)

Max. lifting moment	13.4 mt/131 kNm	96590 ft.lbs
Max. lifting capacity	6200 kg/60.8 kN	13670 lbs
Max. hydraulic outreach	17.0 m	55' 9"
Max. manual outreach	19.0 m	62' 4"
Max. outreach (with fly jib)	23.0 m	74' 10"
Slewing angle	420 °	
Slewing torque	1.6 mt/15.7 kNm	11580 ft.lbs

Stabilizer spread	std. 5.0 m/16' 5"	max. 6.6 m/21' 8"
Fitting space required (std.)	0.83 m	2' 9"
Width folded	2.51 m	8' 3"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 50 l/min to 70 l/min	13.2 US gal./min to 18.5 US gal./min
Dead weight (std.)	1789 kg	3940 lbs

