


PK 23002-SH

High Performance

PALFINGER CRANE



KTL
protected

**Paltronic
150**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored

AOS
Active Oscillation Suppression
inside


The out and out star in its league with continuous slewing system

This truck-mounted crane is the culmination of 70 years of experience and the most meticulous development work. Its design is striking. Its performance leaves nothing to be desired.


Equipped with continuous slewing system and Power Link Plus, it is second to none in flexibility. Its intelligent control technology has all the bells and whistles when it comes to convenience and operator-friendliness.

Unbeaten in manoeuvrability and precision control

PK 23002 SH High Performance

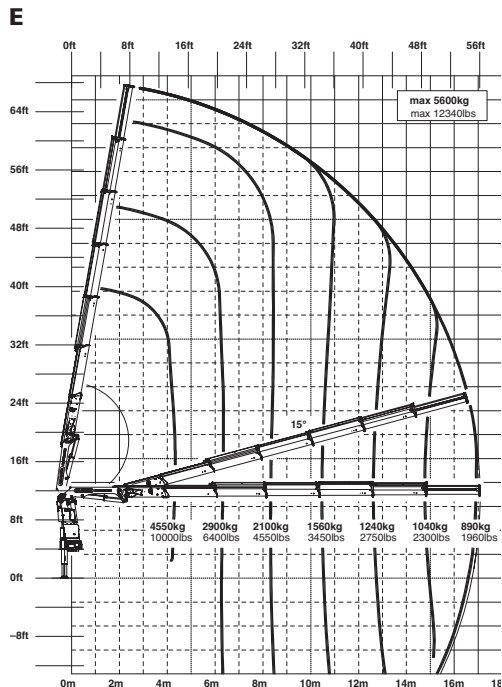

C PJ060B JV2

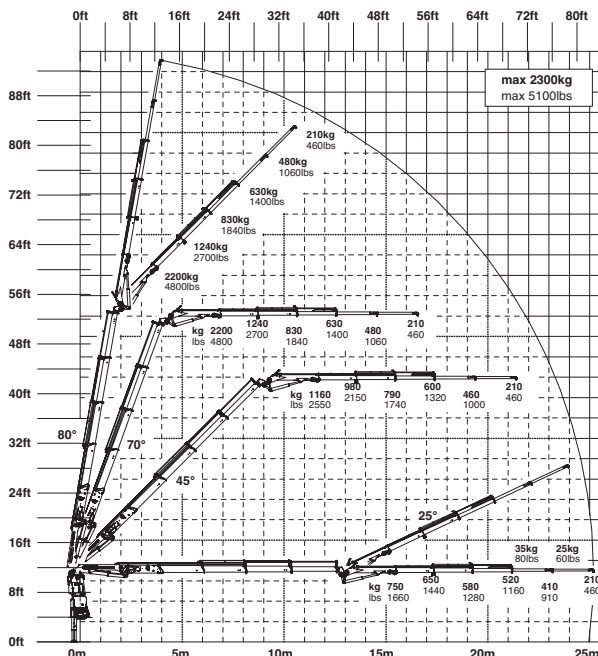

Technical Specifications (EN 12999 HC1 HD5/B3)

Max. lifting moment	21.9 mt/215.0 kNm	158560 ft.lbs
Max. lifting capacity	6200 kg/60.8 kN	13440 lbs
Max. hydraulic outreach	17.1 m	56' 1"
Max. manual outreach	19.1 m	62' 8"
Max. outreach (with fly jib)	25.2 m	82' 8"
Slewing angle	endless	

Slewing torque	2.3 mt/22.6 kNm	16640 ft.lbs
Stabilizer spread	std. 5.6 m/18' 4"	max. 7.4 m/24' 3"
Fitting space required (std.)	0.99 m	3' 3"
Width folded	2.53 m	8' 4"
Max. operating pressure	365 bar	5293 psi
Recommended pump capacity	from 65 l/min to 90 l/min	17.2 US gal./min to 23.8 US gal./min
Dead weight (std.)	2549 kg	5620 lbs

