

POLYP GRAB


PALFINGER



THE HEAVY DUTY SCRAP GRAB

Polyp grab in sturdy design for use on truck cranes or excavators up to 7,5 t operating weight. 27 different variants, with 4, 5 or 6 tines, optional with full jaws, half jaws or without jaws, with 250 l, 350 l or 500 l capacity.


The gripping tines are positioned in a sturdy, torsion-rigid centre piece and owing to the individual working hydraulic cylinders the tines adapt to the surface of the goods to be handled. (Operating pressure: 260 bar)

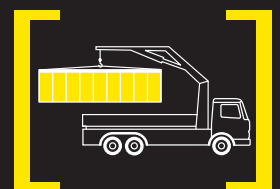

POLYP GRAB WITH FULLY CLOSING TINES

For handling swarf and waste glass, for excavation works and transporting of sand, soil, gravel, ballast and the like.


	Capacity (Ltr./c.y.)	Weight (kg/lbs)
PZG 250PV 4	250 / 0.33	440 / 970
PZG 350PV 4	350 / 0.46	455 / 1003
PZG 500PV 4	500 / 0.65	525 / 1157
PZG 250PV 5	250 / 0.33	515 / 1135
PZG 350PV 5	350 / 0.46	535 / 1179
PZG 500PV 5	500 / 0.65	600 / 1323
PZG 250PV 6	250 / 0.33	600 / 1323
PZG 350PV 6	350 / 0.46	615 / 1356
PZG 500PV 6	500 / 0.65	675 / 1488

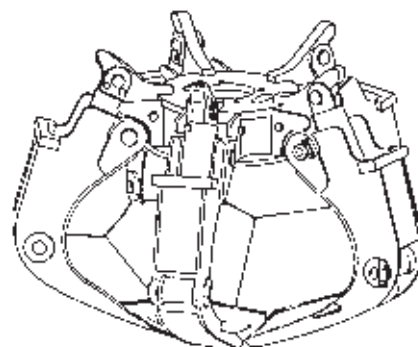

POLYP GRAB WITH HALF CLOSING TINES

For handling swarf, scrap, garbage, rubble and waste paper.


	Capacity (Ltr./c.y.)	Weight (kg/lbs)
PZG 250PH 4	250 / 0.33	410 / 904
PZG 350PH 4	350 / 0.46	430 / 948
PZG 500PH 4	500 / 0.65	475 / 1047
PZG 250PH 5	250 / 0.33	495 / 1091
PZG 350PH 5	350 / 0.46	515 / 1135
PZG 500PH 5	500 / 0.65	560 / 1235
PZG 250PH 6	250 / 0.33	575 / 1268
PZG 350PH 6	350 / 0.46	595 / 1312
PZG 500PH 6	500 / 0.65	650 / 1433

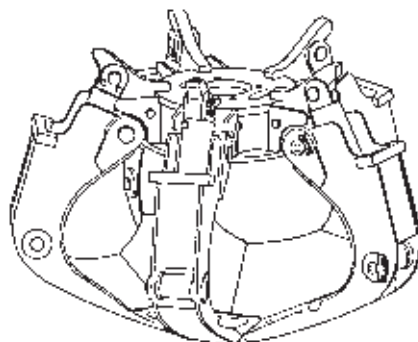

POLYP GRAB WITH POINTED TINES

Touching at tips only. For handling bulky scrap, car bodies and bundled waste paper.

	Capacity (Ltr./c.y.)	Weight (kg/lbs)
PZG 250PS 4	250 / 0.33	385 / 849
PZG 350PS 4	350 / 0.46	390 / 860
PZG 500PS 4	500 / 0.65	410 / 904
PZG 250PS 5	250 / 0.33	470 / 1036
PZG 350PS 5	350 / 0.46	485 / 1069
PZG 500PS 5	500 / 0.65	500 / 1102
PZG 250PS 6	250 / 0.33	560 / 1235
PZG 350PS 6	350 / 0.46	570 / 1257
PZG 500PS 6	500 / 0.65	595 / 1312

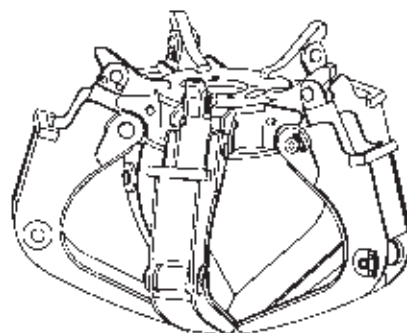

Polyp grabs for operation with continuous rotators.

Due to the available moment of deflection we recommend **PZR 450GF** or **PZR 601GF**.